



Easy 6 Manual

Alimentazione a Gas

CODE: 925806150

Technical features


Outside dimension:	850 L x 915 P x 940 H mm
Space between trays:	80 mm
Trays:	6T GN1/1 - 6T 40X60
Power:	14,5 kW - 12.450 Kcal/h KW
Weight:	100 Kg
Max temperature:	270 ° C
Power supply:	400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment


Controlled steam injection (%)	Glass opening for cleaning	Catalytic burner high performance
Fan inversion system	Halogen lighting	Unique pan support GN 1/1 - 40x60
2 Fan speeds	Continuous operation INF	Mechanical timer 0-120

Accessories

Exhaust & draining, Proofers, Cleaning & purification, Stands & supports, Trays

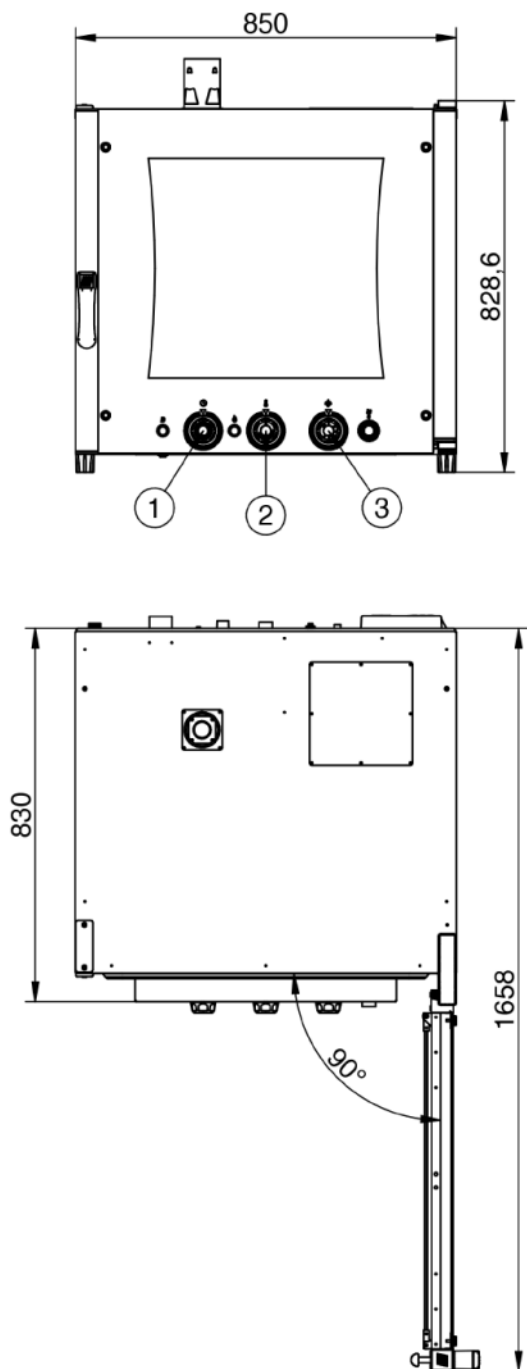Easy 6 Manual
Alimentazione a Gas


- 1 - Manopola Timer - Timer knob - Poignée de la minuterie - Mando del temporizador
 2 - Manopola temp. - Temp. knob - Poignée de la temp. - Mando de la temp.
 3 - Manopola Umidità - Humidity knob - Poignée de l'humidité - Mando humedad

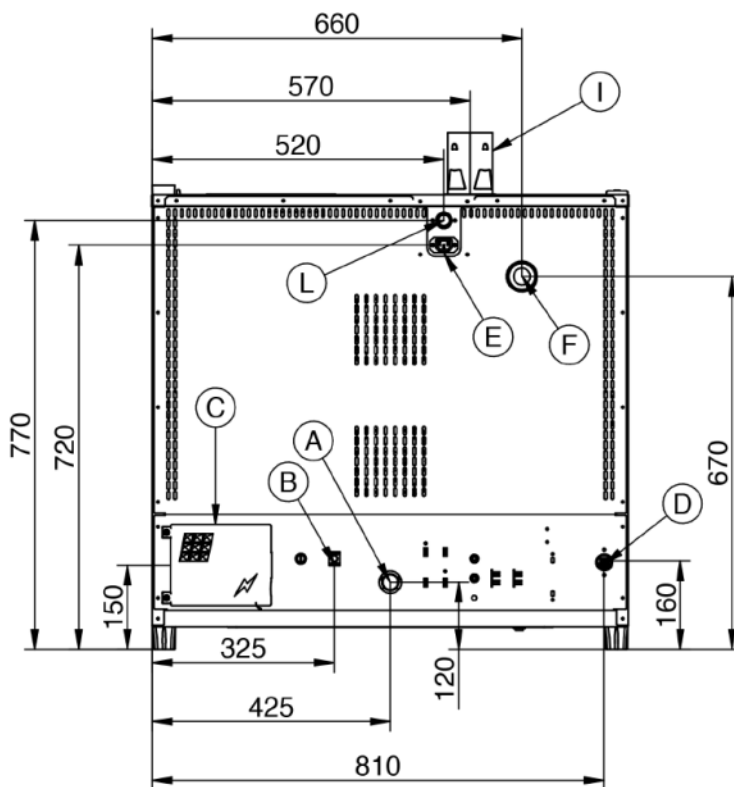

Legend

- A - Drain liquid Ø 30mm
 B - Equipotential terminal comb
 C - Electric supply
 D - Water inlet 3/4"
 E - Extracting hood supply
 F - Steam exhaust Ø 50mm
 G - Ø 80mm Combustion chamber fumes exhaust
 H - Gas supply inlet 3/4"


Easy 6 Manual

Alimentazione a Gas

Connections

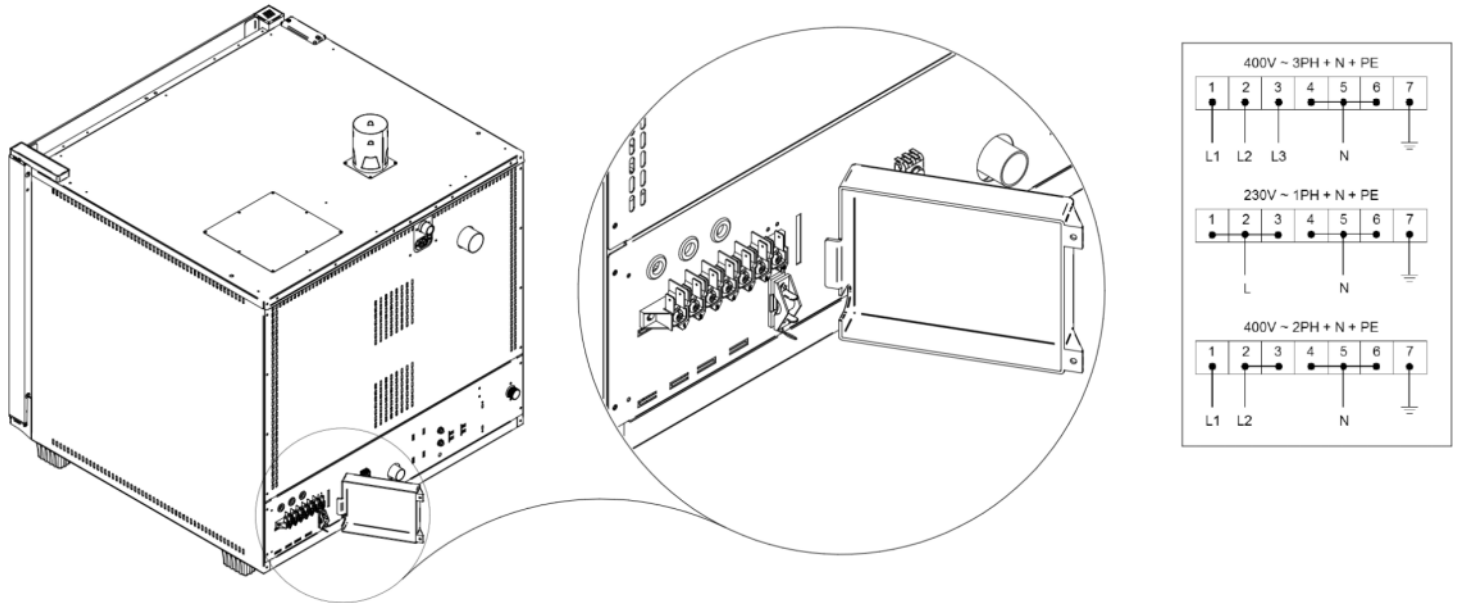

Packaging

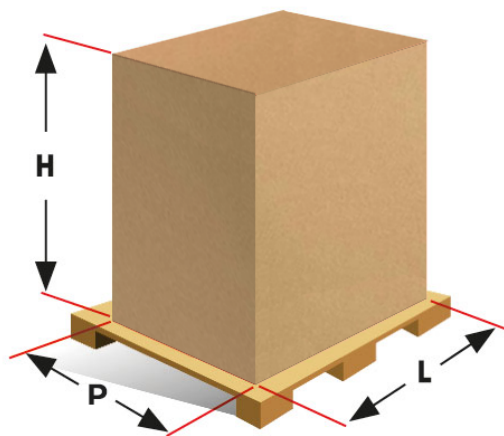

Packing size:	920 L x 1000 P x 1070 H mm
Net weight:	96 Kg
Gross weight:	106 Kg